
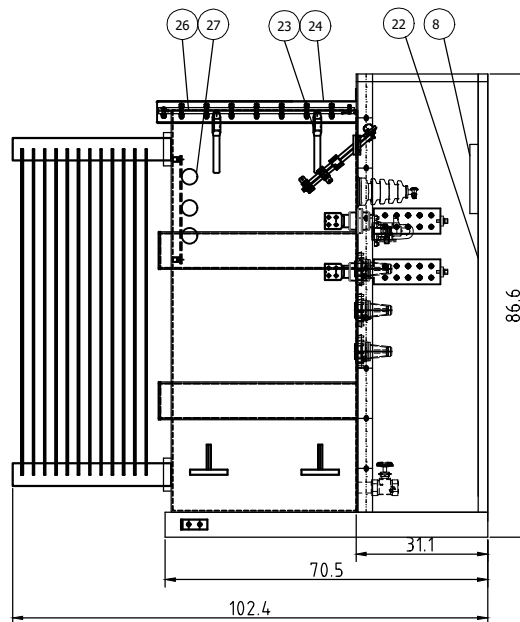
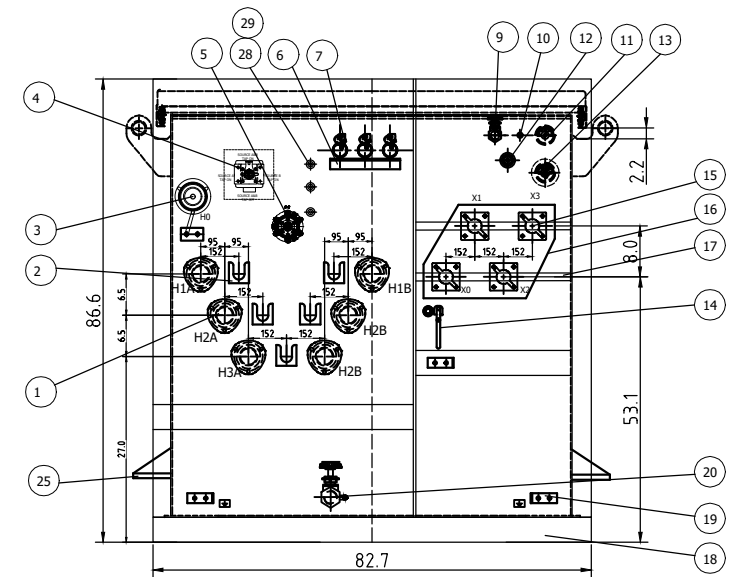


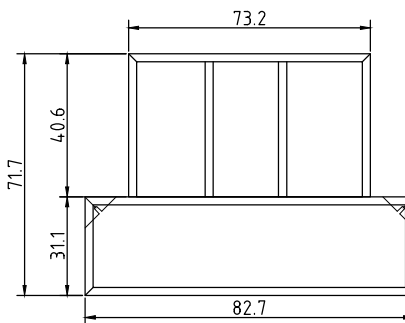


TECHNICAL DATA	
RATING	2600kVA
PRIMARY VOLTAGE	13200V Grd/7621V
SECONDARY VOLTAGE	480V Grd/277V
FREQUENCY	60Hz
VECTOR GROUP	YNyn0
WINDING MATERIAL	AL
PRIMARY BIL VOLTAGE	95kv
SECONDARY BIL VOLTAGE	30kv
INSULATION OIL TYPE	MINERAL OIL
COOLING CLASS	ONAN
TEMPERATURE RISE	65°C
EFFICIENCY	99%
IMPEDANCE	5.7-6.7%
ALTITUDE	≤1000M
No.OF TAP POSITION	5
COLOR	MUNSELL GREEN 7G/3.29/1.5

ITEM	WEIGHT
COILS AND CORES WEIGHT	6710lb
TOTAL OIL WEIGHT	6160lb
TOTAL WEIGHT	16170lb

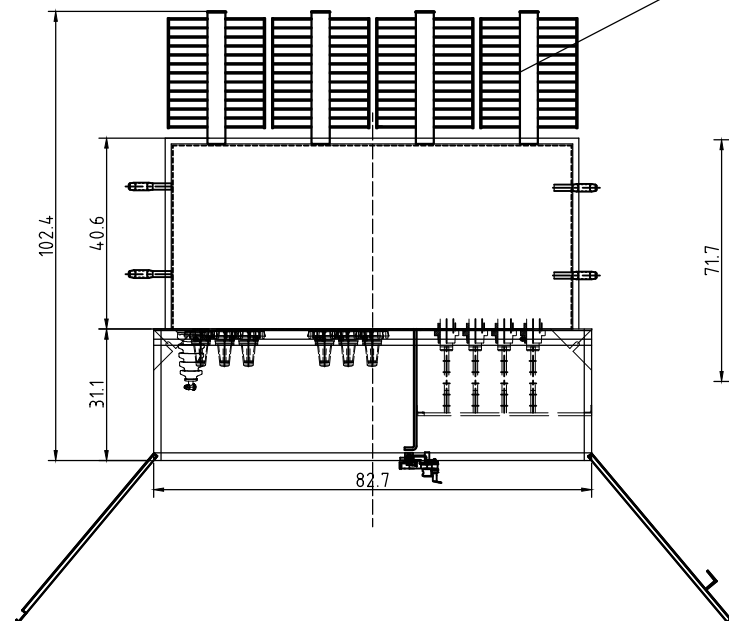

29	UNDER-OIL ARRESTER	3
28	ISO SWITCH	3
27	CURRENT LIMITING FUSES	3
26	BOLTED REMOVABLE TANK LID	1
25	JACK	4
24	FLIP TOP COVER	1
23	LIFTING LUG	4
22	HINGED DOOR	1
21	RADIATOR	3
20	1" DRAIN VALVE WITH 3/8 SAMPLER	1
19	GROUND STEEL PADS	4
18	BASE	1
17	LV BUSHING ADDITIONAL SUPPORT	2
16	750-4000 PADMOUNT LV PLATE	1
15	LV BUSHING 10 HOLES, BIL 30KV	4
14	DOOR HANDLE	1
13	OIL TEMPERATURE GAUGE	1
12	OIL LEVEL GAUGE	1
11	VACUUM PRESSURE GAUGE	1
10	PRESSURE RELIEF VALVE	1
9	1" UPPER FILL PLUG	1
8	NAMEPLATE	1
7	BAY-O-NET FUSES	3
6	DRIP TRAY	1
5	5 POSITION TAP CHANGER +/- 2x2.5%	1
4	FOUR POSITION LOADBREAKER SWITCH	1
3	H0 BUSHING	1
2	PARKING STAND BRACKET	5
1	HV BUSHING (15KV,200A) WITH BUSHING WELL	6
ITEM	DESCRIPTION	QTY
	OPTIONAL TRANSFORMER PARTS LIST	

TYPE ZGS-H-2600/13.2/0.48					DWG. NAME General Assembly Drawing		
DRAWN	CHECKED	CHECKED		APPROVED	FIRST ANGLE PROJECTION	SCALE	1
					P043096		REV. NO.